

# Klacci®

Architectural Locks & Hardware

## LF Series Lever Locks

ANSI Grade 1 Extra Heavy Duty

TRIMS



Type I



Type II



### FEATURES

- >Chassis is standard and I/C lever variations available, allows for versatile applications.
- >Quality cast and machined stainless steel hubs mounted with heavy duty return springs tested over one million cycles without any visible lever sag.
- >Heavier rose liners material provides more attack resistance.
- >Heat treated heavy gauge cold rolled steel spindles withstand 1000 inch pounds of torque applied to the locked lever without gaining access.
- >Threaded outside rose assembly adjustable for door thickness without removing keyed lever.

T 886 6 3840722


F 886 6 3840715

18 Gungye 3rd Road, Annan, Tainan 709, Taiwan.  
sd@klacci.com

## life unlocked

www.klacci.com

Klacci is a registered brand of I-Tek Metal Manufacturing, Co., Ltd. Taiwan.

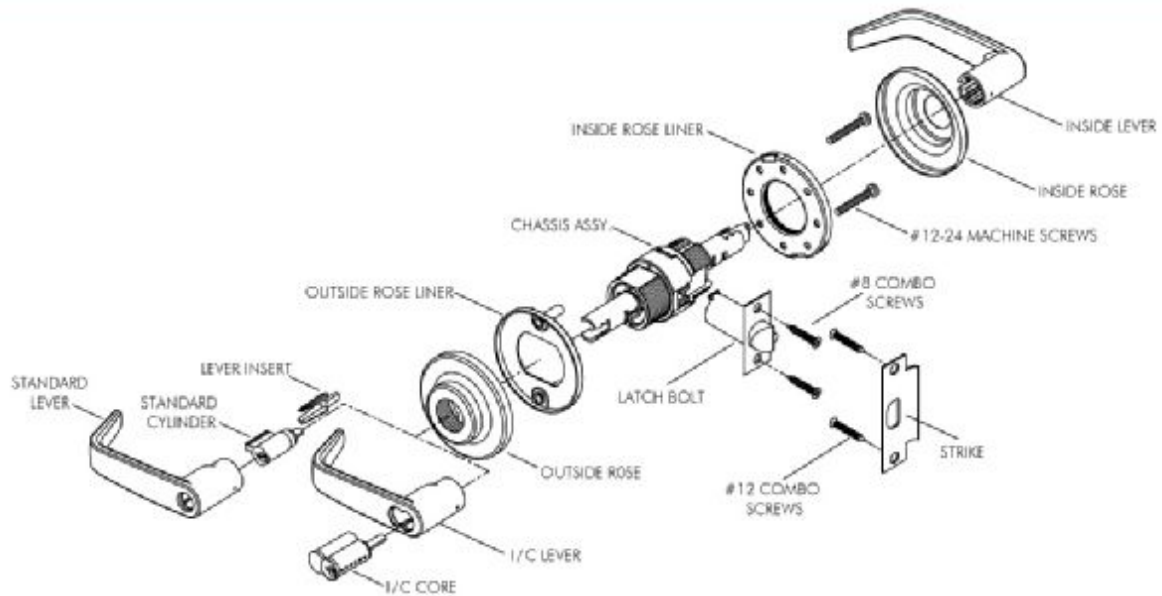
















## FEATURES


- >Chassis is standard and I/C lever variations available, allows for versatile applications.
- >Quality cast and machined stainless steel hubs mounted with heavy duty return springs tested over one million cycles without any visible lever sag.
- >Heavier rose liners material provides more attack resistance.
- >Heat treated heavy gauge cold rolled steel spindles withstand 1000 inch pounds of torque applied to the locked lever without gaining access.
- >Threaded outside rose assembly adjustable for door thickness without removing keyed lever.

## SPECIFICATIONS

<b>Door Thickness</b>	1 3/8" to 2" wood or metal door, 2 1/4" is available.
<b>Backset</b>	2 3/4" standard, 2 3/8", 3 3/4" and 5" optional.
<b>Latchbolt</b>	1/2" throw, UL listed, faceplate self-adjusted, 3/4" throw fire door deadlatch available.
<b>Handing</b>	Non-handed
<b>Strike</b>	ANSI strike standard, T-strike or Full lip strike optional.
<b>Trim</b>	Solid zinc diecast levers, wrought brass roses, concealed screws.
<b>Door Preparation</b>	ANSI A115.2, Through bolted installation.
<b>Cylinder</b>	6-pin "C" keyway standard, nickel silver keys, compatible with Schlage®
<b>Master Keying</b>	Can be masterkeyed or grand masterkeyed. Construction key systems available.
<b>I/C Core</b>	6 or 7-pin, Compatible with Best® and Falcon®
<b>Finishes</b>	605, 606, 612, 613, 625 and 626
<b>Certifications</b>	UL listed for "A" label ( 3 hour) single swinging door (4' x 8'). ANSI/BHMA A156.2, Series 4000 Grade 1.

FUNCTIONS			
LOCATION CODE NUMBER	FUNCTION	OPERATIONS	ANSI NUMBER
	LF SERIES		
ENTRY / OFFICE LOCK 01		<b>Turn / Push button locking.</b> Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned.	F81
STORE DOOR LOCK 02		Deadlocking latchbolt operated by lever from either side, except when both levers are locked by key in lever from either side.	F91
CLASSROOM LOCK 03		Deadlocking latchbolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latchbolt is operated by key in outside lever or by rotating inside lever.	F84
COMMUNICATING LOCK 04		Deadlocking latchbolt operated by lever from either side. Turning key in either lever locks or unlocks its own lever independently.	F80
STOREROOM LOCK 05		Deadlocking latchbolt operated by key in outside lever or rotating inside lever. Outside lever is always fixed.	F86
VESTIBULE LOCK 06		Deadlocking latchbolt operated by lever from either side except when outside lever is locked by key from inside, latchbolt may be retracted by key in outside lever or by rotating inside lever.	F88
INSTITUTIONAL LOCK 09		Deadlocking latchbolt operated by key in lever from either side. Both levers always fixed.	F87
HOTEL / MOTEL LOCK H1		Deadlocking latchbolt operated by lever from inside at all times. Outside lever always fixed. Latchbolt operated by key from outside except when push button inside is operated thus shutting out all keys except emergency key. Inside push button provides lockout feature by keeping indicator thrown. Turning inside lever or closing door releases indicator and shut out feature.	F93
PATIO LOCK 10		Deadlocking latchbolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by rotating inside lever or closing door.	F77
PRIVACY LOCK 20		Latchbolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside, rotating inside lever or closing door.	F76
PASSAGE / CLOSET SET 30		Latchbolt operated by lever from either side at all times.	F75
SINGLE DUMMY TRIM 40		Single dummy trim for one side of door.	
EXIT LATCH 50		Deadlocking latchbolt by inside lever. Outside lever rigid.	F89
CONNECTING ROOM / EXIT LOCK 60		Deadlocking latchbolt operated from inside only. Blank plate outside.	
CONNECTING ROOM / EXIT LOCK 63		Deadlocking latchbolt operated by lever from inside except when inside lever is locked by key. Blank plate outside.	

**CYLINDERS**



**STRIKES**



**ANSI Strike #D27**  
4 7/8" × 1 1/4"  
Lip length 1 1/4"




**T-Strike #B27**  
2 3/4" × 1 1/8"  
Lip length 1 1/8"



**Full Lip Strike, #C27**  
2 1/4" × 1 3/4"  
Lip length 1 1/4"


**LATCHES**



**Fire Door Deadlatch**  
3/4" Throw  
2 1/4" × 1 1/8"




**Deadlatch**  
1/2" Throw  
2 1/4" × 1 1/8"



**Spring latch**  
1/2" Throw  
2 1/4" × 1 1/8"

**EXTENSION LINKS**

To join appropriate extension link with 2 3/4" backset latch for required backset.

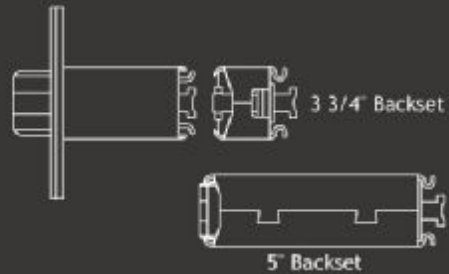

**HOW TO ORDER**

LF	10	01	626	4	D27	KD	
Series	Trims	Function Code	Finishes	Backsets	Strike Types	Keying	
LF Series	10—Type I	STD	See page 3	605	8—2 3/8"	D27 — ANSI Strike	KD
	11—Type I	I/C		606	4—2 3/4"	B27 — T Strike	AK
	20—Type II	STD		612	3—3 3/4"	C27 — Full lip Sq. Corner	KA
	21—Type II	I/C		613	5—5"	CR27— Full lip 1/4" R. Corner	
				625			
				626			